Wheel Chock



Designed for the heavy commercial chocking of vehicles such as aircraft, lorries and large trailers, Wheel Chocks are constructed for the toughest operational conditions.

Manufactured from EPDM rubber, the Wheel Chocks resist oil, salt and ozone attack, and unlike wood, will not rot, crack or splinter. The high-performance, impact-resistant design keeps heavyweight vehicles stationary, preventing accidental movement.


Supplied with a 2 metre high-visibility rope and featuring co-extruded yellow stripes to further draw attention.

TÜV NORD
TÜV NORD Systems GmbH & Co. KG
Freiwillige Prüfung
A-SAFE PENDULUM IMPACT TESTER

Code of Practice for Workplace Safety Barriers
PAS13
2017


PROTECT
SAFE SYSTEM
0739.646.666 - office@protectsafe.ro

Engineered for performance

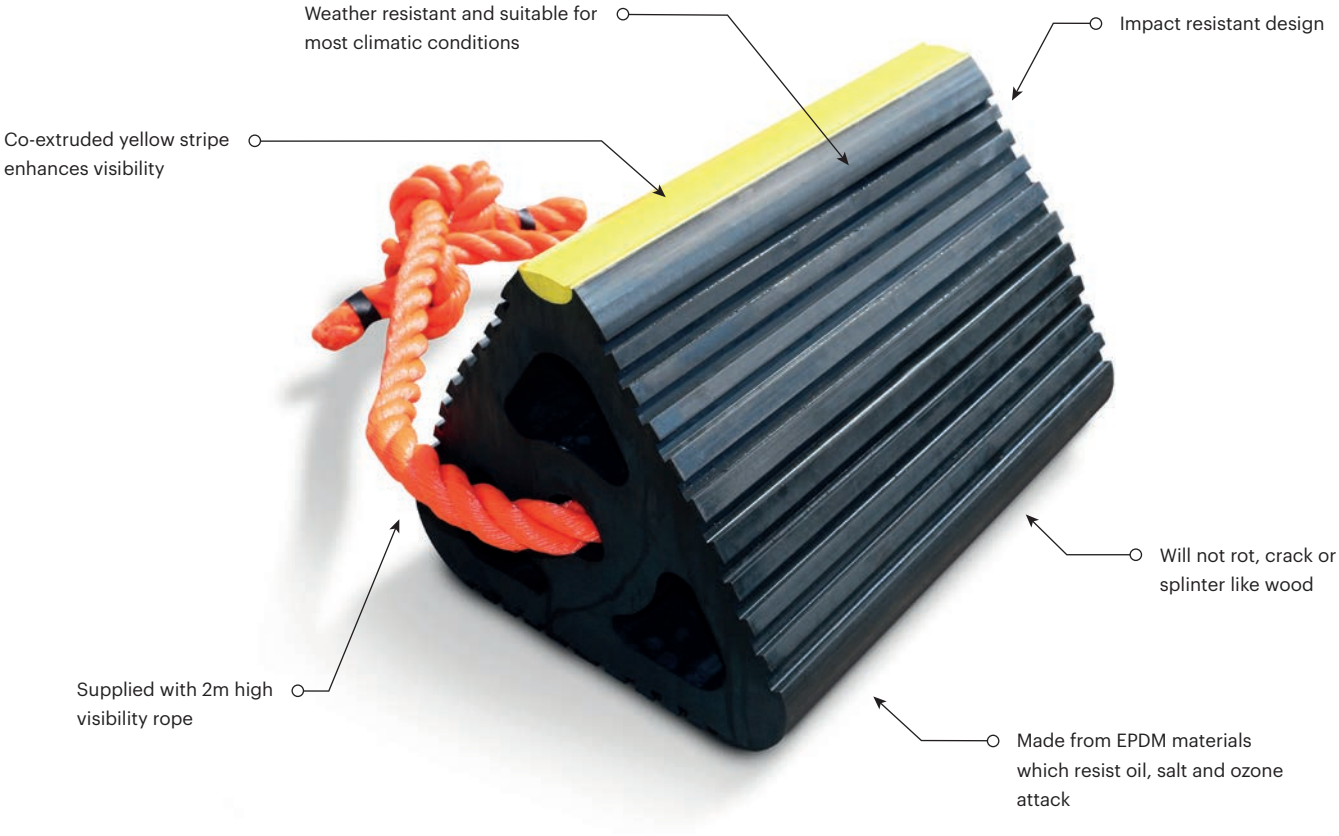

Technical Information

Dimensions (mm)

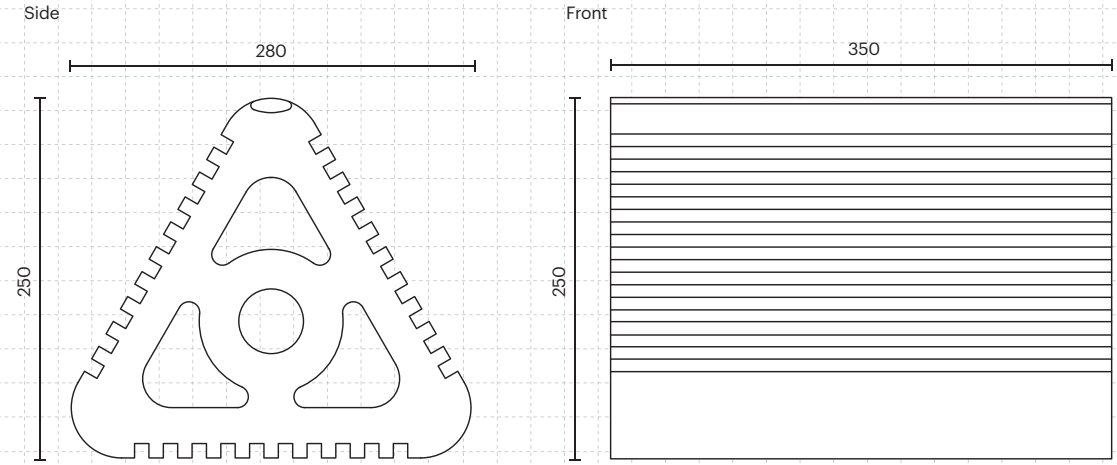

A-SAFE Headquarters
Habergham Works, Ainleys Industrial Estate, Elland, HX5 9JP, West Yorkshire, United Kingdom.
www.asafe.com