eFlex™ ForkGuard™

Kerb Barrier



Designed to provide ground level protection for walls, buildings and equipment.

The eFlex ForkGuard deflects vehicle forks in shallow angle or low-force impacts. It also acts as a pallet stop or buffer preventing stored goods encroaching into pedestrian areas or walkways.


Floor mounted and bolted from above, the eFlex ForkGuard integrates with A-SAFE barriers when installed together.

TÜV NORD
TÜV NORD Systems GmbH & Co. KG
Freiwillige Prüfung
A-SAFE PENDULUM IMPACT TESTER

Code of Practice for Workplace Safety Barriers
PAS13
2017

PROTECT
SAFE SYSTEM
0739.646.666 - office@protectsafe.ro

Engineered for performance

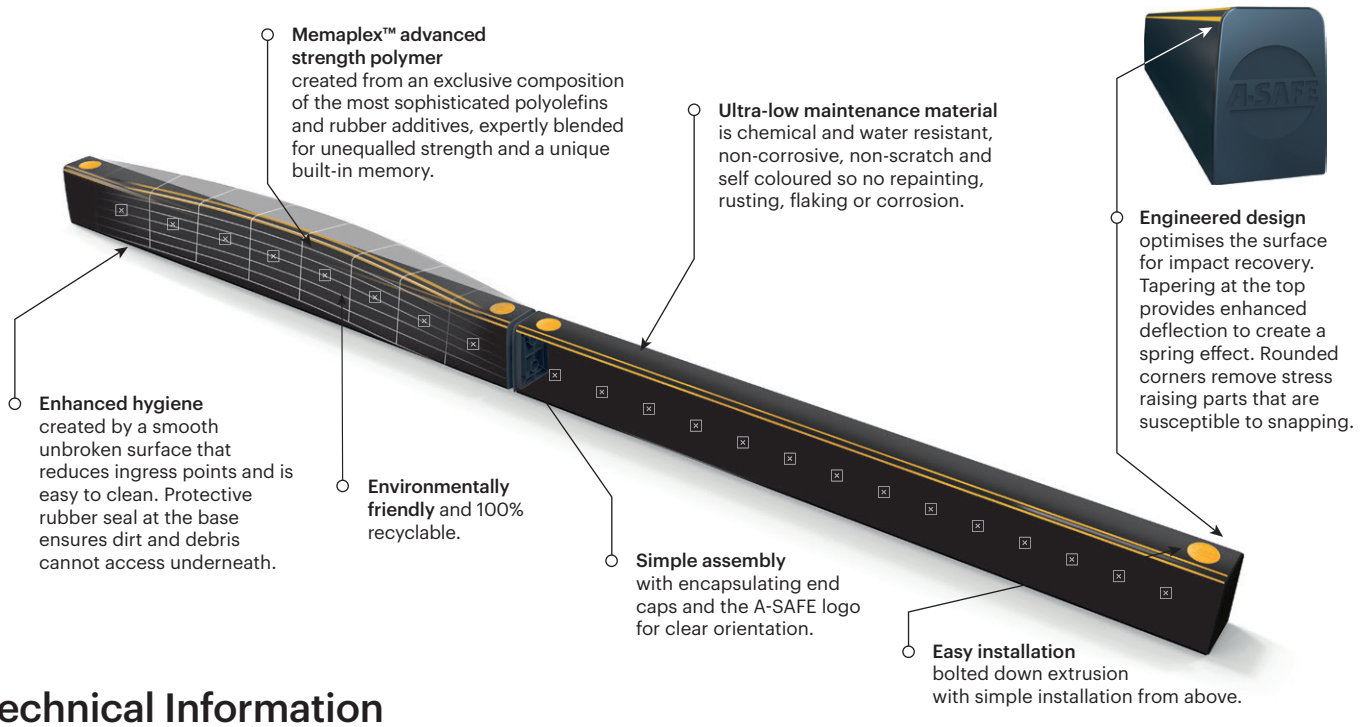


Technical Information

Impact Test

Max Energy (Joules) at 90° 3,000


Deflection at Max Energy
300mm

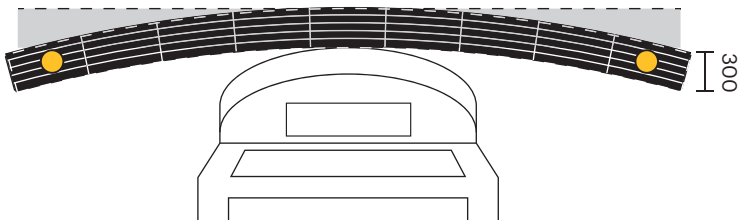

Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	No

* Weathering scale 1 is very poor and 5 is excellent
** Light stability scale 1 is very poor and 8 is excellent

Dimensions (mm)

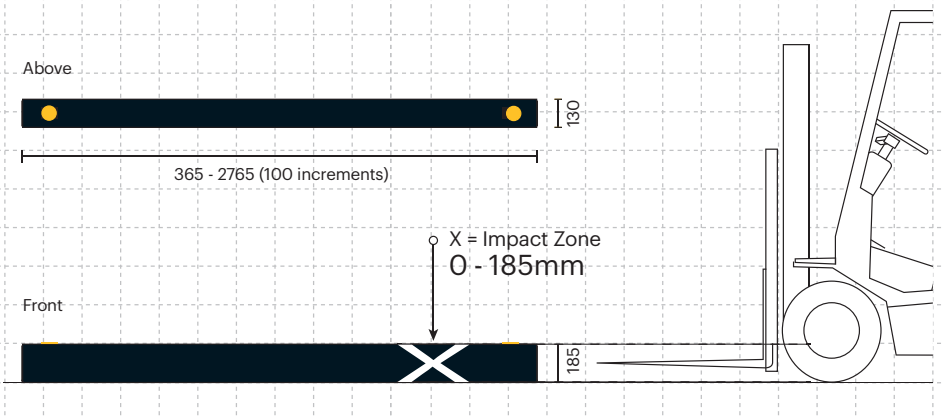

Colour Combinations



Standard Black with Yellow Stripes
RAL 9005* PANTONE Black



Standard Black with Grey Stripes
RAL 9005* PANTONE Black

*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

A-SAFE Headquarters
Habergham Works, Ainleys Industrial Estate, Elland, HX5 9JP, West Yorkshire, United Kingdom.
www.asafe.com