iFlex™ Slide Gate



Slide Gates provide access openings for pedestrians and vehicles at certain points within barrier sections.

The gate creates a physical stop to prevent pedestrians and drivers travelling straight through a gap or crossing point. The telescopic sliding motion optimises space and can remain open; ideal for vehicle entry and exit into areas.


Compatible with all Pedestrian Barriers and combined Pedestrian and Traffic Barriers, they can be installed on their own or in pairs to increase the size of the opening.

TÜV NORD Systems GmbH & Co. KG
Freiwillige Prüfung PIT001 - 28.01.2013 / 1568/41.07130
A-SAFE PENDULUM IMPACT TESTER

Code of Practice for Workplace Safety Barriers
PAS13 2017

PROTECT SAFE SYSTEM
0739.646.666 - office@protectsafe.ro

Engineered for performance

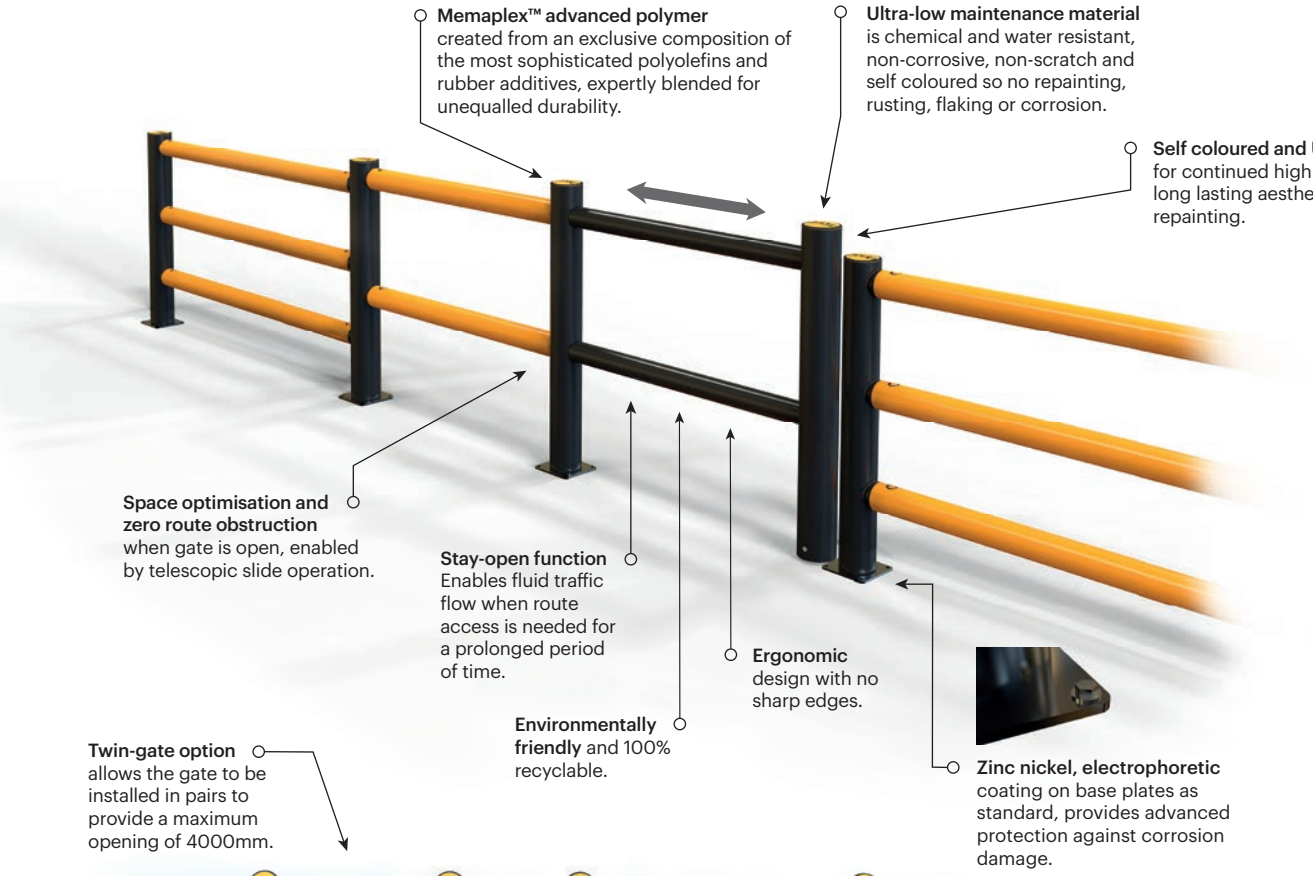

Memaplex™ advanced polymer created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled durability.

Ultra-low maintenance material is chemical and water resistant, non-corrosive, non-scratch and self coloured so no repainting, rusting, flaking or corrosion.

Self coloured and UV stabilised for continued high visibility and long lasting aesthetics with no repainting.

Space optimisation and zero route obstruction when gate is open, enabled by telescopic slide operation.

Stay-open function Enables fluid traffic flow when route access is needed for a prolonged period of time.

Ergonomic design with no sharp edges.

Environmentally friendly and 100% recyclable.

Zinc nickel, electrophoretic coating on base plates as standard, provides advanced protection against corrosion damage.


Twin-gate option allows the gate to be installed in pairs to provide a maximum opening of 4000mm.




ADDITIONAL BASE OPTIONS




Countersunk Bolts



Galvanised Steel




Stainless Steel 316 Standard



Stainless Steel 316 Countersunk


Technical Information

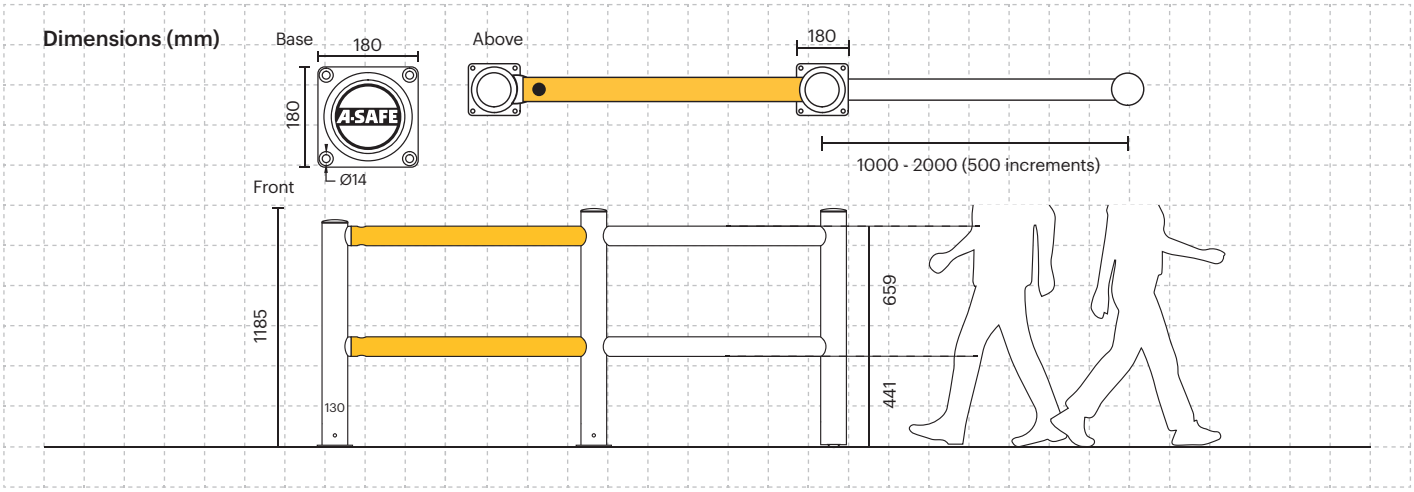

Post Options



Standard Black
RAL 9005*
PANTONE Black



Standard Yellow
RAL 1007*
PANTONE 7548*

Rail Option



Standard Black
RAL 9005*
PANTONE Black

Colour Combinations

*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

A-SAFE Headquarters
Habergham Works, Ainleys Industrial Estate, Elland, HX5 9JP, West Yorkshire, United Kingdom.
www.asafe.com